




# ALUMINIZED ATTACK™



Aluminized Attack

## Compliant to the new 2018 Edition NFPA 1971

### Attack Proximity Gear Materials

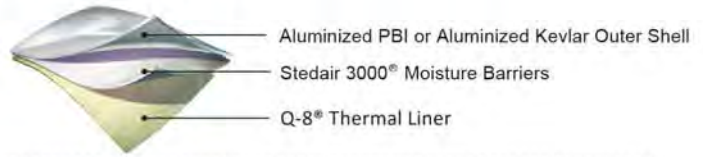

#### Outer shell

Aluminized PBI: 7.0 oz. per square yard, aluminized PBI Ripstop knit.  
 Aluminized Kevlar: 8.5 oz. per square yard, aluminized Kevlar Ripstop knit.

#### Moisture Barrier

Stedair®3000: 7.4 oz. per square yard spun Nomex®laminated to an ePTFE membrane. A combination of microporous and monolithic barriers.

#### Thermal Liner

Q-8®: 8.0 oz./yd² Meta-Aramid / FR Royon batt quilted to a Meta-Aramid / FR Modacrylic plain weave facecloths.

Aluminized PBI Outer Shell — Thermal Protective Performance(TPP) ≥47, Radiant Heat Reflectance >95%, Tensile Strength> 7KN

Aluminized Kevlar Outer Shell — Thermal Protective Performance(TPP) ≥48, Radiant Heat Reflectance >95%, Tensile Strength> 7KN



3. "Easy Grip" DRD



15. 135R

#### Coat

1	35" Length Coat
2	Zipper/Velcro® Closure
3	"Easy Grip" DRD
4	Low Profile 3" Collar with Hanger Loop
5	Set-In Pleated Ergonomically Curved Sleeves
6	7" Black Kevlar® Thumbhole Wristers
7	5" Deep Black Stedprene Sleeve Wells
8	Black Arashield Coat and Pant Cuff Reinforcements
9	2" x 10" x 10" Coat Expansion Pockets Lined with Kevlar® Twill
10	Liner Inspection Velcro Opening

#### Pants

11	Pant Closure: Hook & Dee, Snap with Velcro® Fly Closure
12	Arashield® reinforced knees for increased liquid resistance and maximum durability.
13	Black Arashield Pant Cuff Reinforcements Double Stitched
14	Reverse Boot Cut
15	135R Black-Ops Multi Adjust Suspenders No Metal Suspender Buttons!

Available colors

Silver ●

Sizes

XS-2XL

Case Pack

1 Suit/Case